

# 4-Channel Video Encoder

DVS4104




## Key Features

- 4 channel video and audio inputs
- H.264 video compression
- Full channel 960H realtime encoding
- Dual-stream


## Specifications

| DVS4104                   |  |
|---------------------------|--|
| <b>Video</b>              |  |
| Video Input               | 4-ch, BNC  |
| Video Standard            | H.264  |
| Video bit rate            | 960H/D1: 512 Kbit/s - 8192 Kbit/s; 2CIF: 256 Kbit/s - 4096 Kbit/s; CIF: 128 Kbit/s - 1024 Kbit/s |
| Video stream              | 1)H.264 single stream; 2) H.264 + H.264 dual streams   |
| <b>Audio</b>              |  |
| Input                     | 4-ch   |
| Output                    | 1-ch   |
| Audio Standard            | G.711 $\mu$  |
| Sound track               | Mono   |
| Mute                      | Support  |
| <b>External Interface</b> |  |
| Network Interface         | 2 RJ-45 10M/100M adaptive Ethernet Interface   |
| USB Interface             | 1 USB2.0 interfaces  |
| Serial Interface          | 1 RS-232, 2 RS-485   |
| Alarm Input               | 4-ch   |
| Alarm Output              | 2-ch   |
| <b>General</b>            |  |
| Power Supply              | 12V DC   |
| Consumption               | $\leq 10$ W (with subcard )  |
| Working Temperature       | -10°C ~ + 60°C ( +14°F ~ +140°F )  |
| Working Humidity          | 10% ~ 90%  |
| Weight                    | $\leq 1.5$ Kg ( 3.3 lb )   |
| Dimensions                | 40 x 250 x 189mm ( 1.6" x 9.8" x 7.4" )  |

## Dimensions

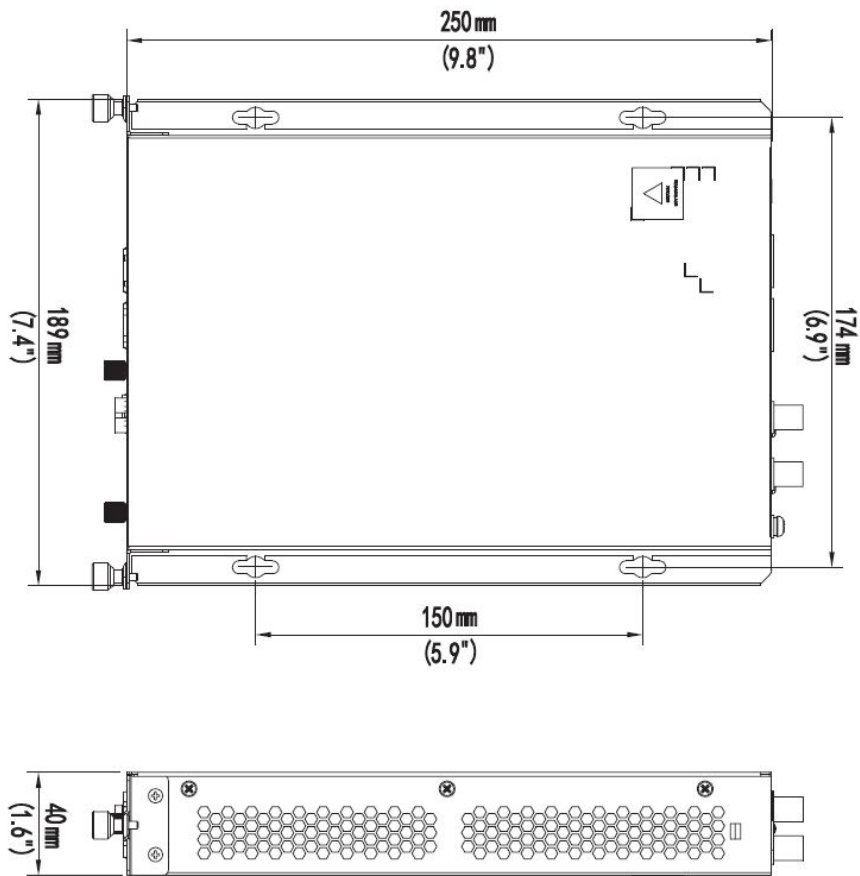


## Rear Panel

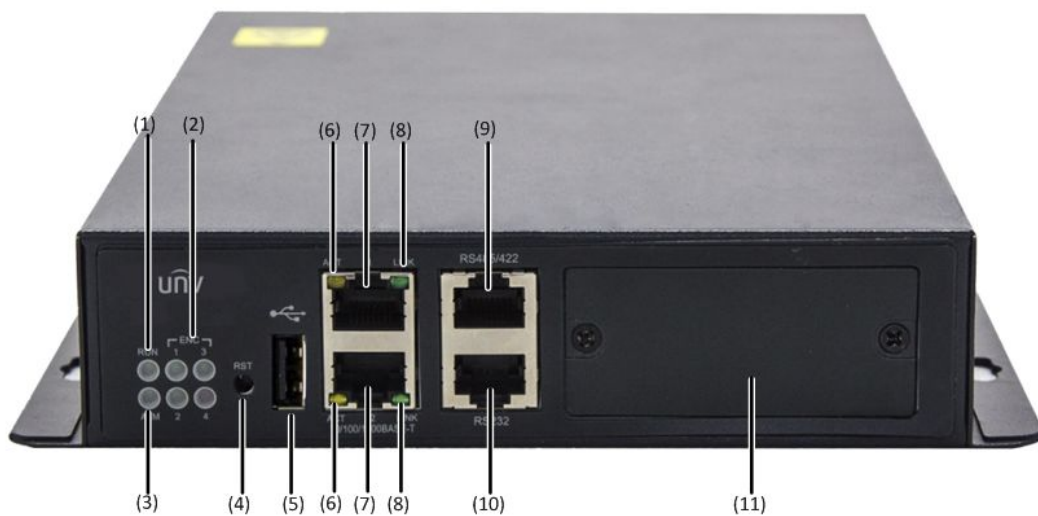

Front view

|                   |                   |                 |
|-------------------|-------------------|-----------------|
| (1) Running LED   | (2) Encoding LED  | (3) Alarm LED   |
| (4) Reset button  | (5) USB Port      | (6) Active LED  |
| (7) Ethernet Port | (8) Link LED      | (9) RS-485 Port |
| (10) RS-232 Port  | (11) Subcard Slot |                 |

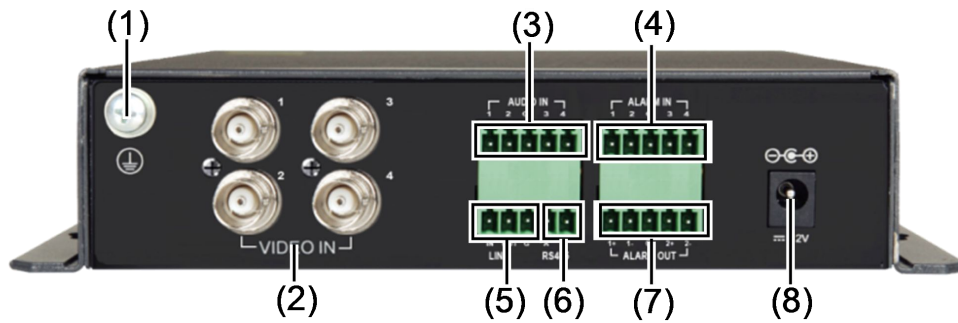

Rear view

|                    |                   |                   |
|--------------------|-------------------|-------------------|
| (1) GND            | (2) Video In Port | (3) Audio In Port |
| (4) Alarm In Port  | (5) Line In Port  | (6) RS-485 Port   |
| (7) Alarm Out Port | (8) Power Input   |                   |

**Zhejiang Uniview Technologies Co., Ltd.**

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2011-2015 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.